

FORM PTO-1390
(REV. 5-93)U. S. DEPARTMENT OF COMMERCE
PATENT AND TRADEMARK OFFICEATTORNEY'S DOCKET NUMBER
10191/1541TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)

09/622290

INTERNATIONAL APPLICATION NO.
PCT/DE99/03143INTERNATIONAL FILING DATE
(30.09.99)
30 September 1999PRIORITY DATES CLAIMED
(14.12.98)
14 December 1998

TITLE OF INVENTION

ASSEMBLING DEVICE FOR ASSEMBLING AND DISASSEMBLING A FUEL INJECTOR

APPLICANT(S) FOR DO/EO/US

HANS, Waldemar; LINSSEN, Mathias; and VOGEL, Christof

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
 2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
 3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) immediately rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
 4. ☐ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
 5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US)
 6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
 7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
 8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
 9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)). (Unsigned)
 10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).
- Items 11. to 16. below concern other document(s) or information included:**
11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
 12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
 13. ☒ A **FIRST** preliminary amendment.
 - ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
 14. ☐ A substitute specification.
 15. ☐ A change of power of attorney and/or address letter.
 16. ☒ Other items or information: Copies of International Search Report and Form PCT/RO/101.

EXPRESS NO.

EL30270029345

09/622290

17. ☒ The following fees are submitted:**Basic National Fee (37 CFR 1.492(a)(1)-(5)):**

Search Report has been prepared by the EPO or JPO \$840.00

International preliminary examination fee paid to USPTO (37 CFR 1.482) ... \$670.00

No international preliminary examination fee paid to USPTO (37 CFR 1.482) but
international search fee paid to USPTO (37 CFR 1.445(a)(2)) \$750.00Neither international preliminary examination fee (37 CFR 1.482) nor international
search fee (37 CFR 1.445(a)(2)) paid to USPTO \$970.00
International preliminary examination fee paid to USPTO (37 CFR 1.482) and all
claims satisfied provisions of PCT Article 33(2)-(4) \$30.00

CALCULATIONS | PTO USE ONLY

ENTER APPROPRIATE BASIC FEE AMOUNT =

\$840

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30 months
from the earliest claimed priority date (37 CFR 1.492(e)).

\$

Claims

Number Filed

Number Extra

Rate

Total Claims

10 - 20 =

0

X \$18.00

\$ 0

Independent Claims

1 - 3 =

0

X \$78.00

\$ 0

Multiple dependent claim(s) (if applicable)

+ \$60.00

\$

TOTAL OF ABOVE CALCULATIONS =

\$ 840

Reduction by 1/2 for filing by small entity, if applicable. Verified Small Entity statement must
also be filed. (Note 37 CFR 1.9, 1.27, 1.28).

\$

SUBTOTAL =

\$ 840

Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☐ 30
months from the earliest claimed priority date (37 CFR 1.492(f)).

+

\$

TOTAL NATIONAL FEE =

\$ 840

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be
accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property

+

\$

TOTAL FEES ENCLOSED =

\$ 840

Amount to be:

refunded

\$

charged

\$

- a. ☐ A check in the amount of \$_____ to cover the above fees is enclosed.
- b. ☒ Please charge my Deposit Account No. 11-0600 in the amount of **\$840.00** to cover the above fees. A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 11-0600. A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Kenyon & Kenyon
One Broadway
New York, New York 10004

SIGNATURE

Richard L. Mayer, Reg. No. 22,490

NAME

DATE

8/14/00

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Inventor(s) : Waldemar HANS et al.
Serial No. : To Be Assigned
Filed : Herewith
For : ASSEMBLING DEVICE FOR ASSEMBLING AND
DISASSEMBLING A FUEL INJECTOR
Examiner : To Be Assigned
Art Unit : To Be Assigned

Assistant Commissioner for Patents
Washington, D.C. 20231

PRELIMINARY AMENDMENT

SIR:

Kindly amend the above-identified application before
examination, as set forth below.

IN THE SPECIFICATION:

Please amend the specification as follows.

On page 1, delete lines 1-2, and insert:

--FIELD OF THE INVENTION--.

On page 1, line 4, change "in particular" to --for
example--.

On page 1, delete lines 10-11, and insert:

--BACKGROUND INFORMATION--.

On page 1, line 13, change "already known from" to
--described in--.

On page 1, line 14, change "197 05 990 A1, a" to
--No. 197 05 990. A--.

On page 1, line 15, change "being" to --is--.

On page 1, line 16, change "being" to --is--.

EL30270029SUS

On page 1, line 27, change "because" to --of--.

On page 1, line 29, after "be" insert
--disadvantageously--.

On page 1, line 30, change "tools, which is
disadvantageous." to --tools.--.

On page 1, line 31, change "known" to
--conventional--.

On page 2, line 3, after "hole" insert
--disadvantageously--, and change "alone, which is" to
--alone.--.

On page 2, delete line 4.

On page 2, line 6, after "Patent" insert --No.--.

On page 2, line 12, change "known from" to
--described in--, and after "Patent" insert --No.--.

On page 2, line 16, delete "here".

On page 2, before line 19, insert:
--SUMMARY--.

On page 2, delete line 20, and insert:
--has the--.

On page 2, line 21, change "related art" to
--conventional device--.

On page 2, line 27, change "preferably" to
--advantageously--.

On page 2, delete lines 30-33.

On page 2, line 35, change "in particular" to --for example--.

On page 3, line 9, change "preferably" to --for example--.

On page 3, line 10, change "holes" to --holes,--.

On page 3, delete line 15-16, and insert:
--injector against the combustion pressure prevailing in the--.

On page 3, line 17, after "chamber" insert --during the operation of the internal combustion engine--.

On page 3, line 18, change "preferably dimensioned" to --dimensioned, for example,--.

On page 3, line 19, after "can" insert --be--.

On page 3, line 32, change "Preferably" to --For example,--.

On page 4, line 1, delete "particularly".

On page 4, line 12, change "a" to --an--.

On page 4, delete lines 20-37, and insert:

--BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 shows a section through a cylinder head of an internal combustion engine, a first embodiment of an assembling device according to the present invention, and a fuel injector inserted into the assembling device.

Figure 2 shows a top view of a second embodiment of an assembling device that is slightly modified with respect to the first embodiment shown in Figure 1.

Figure 3 shows a section along line III-III of Figure 2.

DETAILED DESCRIPTION--.

On page 5, line 2, change "engine and through" to --engine,--.

On page 5, line 3, delete "as".

On page 5, line 4, change "well as" to --and--.

On page 5, line 13, change "10" to --10,--.

On page 5, line 14, change "27, as well as" to --27 leading--.

On page 5, line 34, change "preferably" to --advantageously--.

On page 5, line 35, change "preferably" to --advantageously--.

On page 6, line 7, change "preferably formed" to --formed, for example,--.

On page 6, line 9, change "conceivable" to --possible--.

On page 7, line 12, change "preferably made of metal, in particular of" to --made, for example, of metal, for example--.

On page 7, line 15, change "formed" to --formed,--.

On page 7, line 21, change "compared" to --in comparison--.

On page 7, line 37, change "ideally" to --for example--.

IN THE ABSTRACT:

Please amend the Abstract as follows.

Delete line 1, and insert:

-- ABSTRACT--.

Line 3, delete "{1}".

Line 4, delete "{3}" and "{5}".

Line 5, delete "{2}" and "{12}".

Line 6, delete "{3}".

Line 7, delete "{14}" and "{F_N}".

Line 8, delete "{3}" and "{5}".

Line 9, delete "{F_D}".

Line 10, delete "{3}" (both occurrences).

Line 11, delete "{13}" and "{5}".

Line 12, delete "{12}" and "{13}".

Line 13, delete "{20}" and "{25}".

Line 14, delete "{25}".

Line 15, delete "{2}".

Line 16, delete "{F_D}" and "{13}".

Line 17, delete "(1)" and "(3)".

Line 18, delete "(1)".

IN THE CLAIMS:

On page 9, delete line 1, and insert:

--What Is Claimed Is:--.

Please cancel claims 1-10, without prejudice.

Please add the following new claims:

11. (New) An assembling device for assembling and disassembling a fuel injector in a mounting hole of a cylinder head of an internal combustion engine, the assembling device comprising:
 - a jacket body having a contact section and a collar section, the jacket body at least partially surrounding the fuel injector, a hold-down force for holding down the fuel injector in the mounting hole and a disassembling force for disassembling the fuel injector being able to be exerted on the fuel injector via the contact section, the collar section protruding from the mounting hole, the collar section having at least one thread into which a disassembling screw can be screwed,wherein:
 - when the disassembling screw is tightened, the disassembling screw abuts the cylinder head and transmits a disassembling force to the collar section so that the assembling device with the fuel injector inserted into the assembling device is extracted from the mounting hole.
12. (New) The device according to claim 11, wherein:
 - a plurality of peripherally distributed threads are arranged on the collar section, each of the peripherally

distributed threads corresponding to a disassembling screw.

13. (New) The device according to claim 12, wherein:

two threads of the plurality of peripherally distributed threads are arranged on the collar section diametrically opposite one another, each of the two threads corresponding to a disassembling screw.

14. (New) The device according to claim 11, wherein:

the collar section has at least one opening in which an assembling screw can be inserted so that the assembling screw engages a thread provided in the cylinder head, and

a hold-down force is transmitted to the collar section by tightening the assembling screw, the hold-down force being such that the assembling device with the fuel injector inserted into the assembling device is held down in the mounting hole.

15. (New) The device according to claim 14, wherein:

a plurality of peripherally distributed openings is arranged on the collar section, each of the plurality of peripherally distributed openings corresponding to an assembling screw.

16. (New) The device according to claim 15, wherein:

three openings are arranged on the collar section at an angular distance of greater than 90° from one another, the three openings being bore holes, each of the three openings corresponding to an assembling screw.

17. (New) The device according to claim 14, wherein:

the at least one thread and the at least one opening are dimensioned so that the assembling screw can be used as a disassembling screw.

18. (New) The device according to claim 11, wherein:
the contact section has a radial extension directed inward and an axial extension extending axially over the radial extension, the axial extension transmitting the hold-down force to the fuel injector, the radial extension engaging a disassembling groove of the fuel injector in order to transmit a disassembling force to the fuel injector.
19. (New) The device according to claim 18, wherein:
the radial extension surrounds the fuel injector in a smaller angular area than at least one of the jacket body and the collar section.
20. (New) The device according to claim 11, wherein:
the device is manufactured from a piece of sheet metal by deep drawing.

Remarks

This Preliminary Amendment cancels, without prejudice, claims 1-10 in the underlying PCT Application No. PCT/DE99/03143 and adds new claims 11-20. The new claims conform the claims to U.S. Patent and Trademark Office rules and do not add new matter to the application.

The above amendments to the specification and abstract conform the specification and abstract to U.S. Patent and Trademark Office rules, and do not introduce new matter into the application.

The underlying PCT Application No. PCT/DE99/03143 includes an International Search Report, dated March 2, 2000. The Search Report includes a list of documents that were uncovered in the underlying PCT Application. A copy of the Search Report is included herewith.

It is respectfully submitted that the subject matter of the present application is new, non-obvious, and useful.

Prompt consideration and allowance of the application are respectfully requested.

Respectfully submitted,

Dated: 8/14/00

By: *Richard L. Maye*
Richard L. Maye
Reg. No. 22,490

KENYON & KENYON
One Broadway
New York, NY 10004
(212) 425-7200

ASSEMBLING DEVICE FOR ASSEMBLING AND DISASSEMBLING A FUEL
INJECTOR

Background Information

The present invention relates to an assembling device for assembling and disassembling a fuel injector, in particular a high-pressure direct injector, into and from a mounting hole in a cylinder head of an internal combustion engine. Fuel is injected directly into the combustion chamber of the internal combustion engine through this high-pressure direct injector.

The present invention is based on an assembling device according to the definition of the species of the main claim. An assembling device having a jacket body at least partially surrounding the fuel injector is already known from German Patent Application 197 05 990 A1, a collar section directed inward being formed at a first end of the jacket body, and a collar section directed outward being formed at a second end of the jacket body, opposite the first end. While the collar section directed radially inward can be inserted into a groove of the fuel injection valve, the collar section directed outward protrudes outward from the mounting hole of the fuel injection valve. An appropriate tool, for example, an assembling iron, can engage in the collar section protruding from the mounting hole of the cylinder head in order to lift the assembling device together with the fuel injection valve from the mounting hole. In some cases considerable disassembling forces are required because the fuel injection valves because the fuel injectors may seize in their mounting holes. Therefore the cylinder head, which may be made of light metal, for example, may be damaged by the mounting iron or other lifting tools, which is disadvantageous. Furthermore, it is a disadvantage in the case of the known assembling device that the mounting device transmits no hold-down force to the

fuel injector during the operation of the internal combustion engine, but the fuel injector and the assembling device are held in the mounting hole by friction forces alone, which is disadvantageous.

U.S. Patent 4,561,159 describes a disassembling device for a diesel injector. An end area of the fuel injector opposite the spray orifice can be inserted at the side into a slit in the disassembling device. The disassembling device is not inserted into the mounting bore of the cylinder head and it does not remain in the mounting bore when assembled. The disassembling device known from U.S. Patent 4,561,159 is instead a tool extension which is attached to the fuel injector before disassembling the fuel injector. No hold-down force is transmitted to the fuel injector. Connecting the disassembling device to the fuel injector here is a relatively complicated process.

The assembling device according to the present invention having the characterizing features of Claim 1 has the advantage over the related art that the at least one disassembling screw engaging in a thread of the collar section allows simple and damage-free disassembling of the fuel injector inserted into the assembling device. Disassembling takes place so that the assembling device with the fuel injector is continuously extracted from the mounting hole by tightening the at least one disassembling screw or preferably the plurality of disassembling screws.

Advantageous refinements of and improvements on the assembling device characterized in the main claim are possible through the measures characterized in the subordinate claims.

The threads, each assigned to a disassembling screw, peripherally distributed on the collar section, in particular two threads for two disassembling screws, can ensure that the disassembling force resulting from the tightening of the

plurality of disassembling screws is directed axially, so that increased friction lock due to a radial force component is avoided. A symmetric, continuous pulling force is achieved through the simultaneous tightening of the disassembling screws. As an alternative, disassembling can also be performed by tightening the plurality of disassembling screws alternately.

It is particularly advantageous that openings, preferably in the form of bore holes are provided on the collar section, through which assembling screws engage a thread of the cylinder head. By tightening these assembling screws, sufficient hold-down force is transmitted to the assembling device and thus to the fuel injector to hold down the fuel injector during the operation of the internal combustion engine against the combustion pressure prevailing in the combustion chamber. The threads and the openings in the collar section are preferably dimensioned so that the assembling screws can be used as disassembling screws at the same time. For this purpose, the threads in the cylinder head and the collar section of the assembling device must have the same diameter and the same taper, and the openings must be dimensioned so that the corresponding screw diameters pass through them. When the fuel injector is disassembled, the mounting screws are loosened first and then the mounting screws used as disassembling screws are introduced in the thread of the collar section and tightened, whereby the assembling device with the fuel injector is extracted of the mounting hole in the cylinder head. No special disassembling screws need to be provided.

Preferably at least three openings spaced at an angular distance of 90° , are provided for the mounting screws. This ensures that the hold-down force on the assembling device and thus on the fuel injector is applied uniformly over the periphery.

According to a particularly advantageous embodiment, the contact section of the assembling device engaging the fuel injector has an extension directed radially inward and an axial extension extending axially beyond the radial extension. The axial extension is used for transmitting the hold-down force to the fuel injector, while the radial extension engages a groove of the fuel injector to transmit the disassembling force to the fuel injector. The functions of hold-down and disassembling are separated on the contact section of the assembling device engaging the fuel injector. This has the advantage that the area of the disassembling groove of the fuel injector can be implemented by a injected plastic piece, and the area of the fuel injector engaged by the axial extension must be made of metal. This results in simple and cost-effective manufacturing of the fuel injector housing.

The assembling device can be economically manufactured by deep drawing from sheet metal.

Drawing

Embodiments of the present invention are illustrated in a simplified form in the drawing and are explained in greater detail in the following description.

Figure 1 shows a section through a cylinder head of an internal combustion engine and an embodiment of the assembling device according to the present invention, as well as a fuel injector inserted into the assembling device;

Figure 2 shows an embodiment slightly modified with respect to that of Figure 1 in top view, and

Figure 3 shows a section along line III-III of Figure 2.

Detailed Description of the Embodiments

Figure 1 shows a section through a cylinder head 2 of an internal combustion engine and through an embodiment of assembling device 1 according to the present invention, as well as a fuel injector 3 shown unsectioned, inserted into assembling device 1 according to the present invention.

Fuel injector 3 is used for direct injection of fuel into a combustion chamber 4 of the internal combustion engine. Cylinder head 2 has a mounting hole 5 to accommodate fuel injector 3, which in the embodiment illustrated is divided into a narrow section 6 to accommodate an injection section 7 of fuel injector 3, a widened section 8 to accommodate a disassembling section 9, a fuel feed section 10 and a housing body 27, as well as into a conical section 11 connecting widened section 8 to narrow section 6.

Assembling device 1 according to the present invention has a jacket body 12, which at least partially surrounds fuel injector 3; a collar section 13 directed outward from mounting hole 5 and extending radially outward from jacket body 12, is formed on jacket body 12. A contact section 14 is formed at the end opposite collar section 13 of jacket body 12, through which assembling device 1 engages with fuel injector 3.

Contact section 14 has an extension 15 directed radially inward and an axial extension 16 extending axially beyond radial extension 15. Radial extension 15 engages in a disassembling groove 17 of fuel injector 3, in order to transmit a disassembling force to fuel injector 3. Axial extension 16 engages in a hold-down surface 18 of fuel injector 3 in order to transmit a hold-down force to fuel injector 3.

At least one, however, preferably a plurality of unthreaded openings 19 and at least one, however, preferably a plurality of threaded opening 20 are provided with threads 20 on collar section 13 of assembling device 1. Openings 19 are designed in

5 this embodiment as unthreaded boreholes, traversed by assembling screws 21, which can be screwed into threaded boreholes 22 of cylinder head 2. Openings 19 may be also designed as elongated holes, slots, recesses opening outward, or the like, for example.

10 Threads 20 are preferably formed in threaded holes, with thread 20 being cut directly into collar section 13. It is, however, also conceivable to attach threaded bushings or nuts to collar section 13 of assembling device 1.

15 When fuel injector 3 is assembled, fuel injector 3 is initially inserted into assembling device 1 so that radial extension 15 engages in disassembling groove 17 of fuel injector 3. Then assembling device 1, together with fuel injector 3, is inserted into mounting hole 5 of cylinder head 2. Finally, assembling screws 21 are inserted through openings 19 in collar section 13 and screwed into threads 22 of cylinder head 2. Screw heads 23 of assembling screws 21 contact collar section 13 when assembling screws 21 are tightened and exert a hold-down force F_h indicated by arrow 24 on assembling device 1, which is transmitted via axial extension 16 to hold-down surface 18 of fuel injector 3. Thus, fuel injector 3 is held down in mounting hole 5 against the combustion pressure in combustion chamber 5 during the operation of the internal combustion engine.

25 In order to disassemble fuel injector 3 and assembling device 1, assembling screws 21 are initially loosened and removed from thread 22 of cylinder head 2. Then disassembling screws 25 are inserted into thread 22 of collar section 13, abutting on cylinder head 2. A disassembling force F_d , indicated by arrow 26, is then exerted on assembling device 1; this force is transmitted to disassembling groove 17 of fuel injector 3 via radial extension 15. Thus assembling device 1, together with fuel injector 3 is extracted from mounting hole 5 of cylinder head 2 without need for an assembling iron or another

lifting tool. Relatively large disassembling forces F_D can be exerted on assembling device 1 and fuel injector 3 via disassembling screws 25, so that fuel injector 3 can be reliably removed to be serviced or replaced even if fuel injector 3 has become seized in mounting hole 5.

Due to the fact that both a radial extension 15 and an axial extension 16 are formed on contact section 14 of assembling device 1, the hold-down and disassembling functions are separated from one another. While housing body 27 of fuel injector 3 on which hold-down surface 18 is formed is preferably made of metal, in particular of steel, in order to enable it to transmit a high hold-down force to fuel injector 3, disassembling section 9 of fuel injector, on which disassembling groove 17 is formed can be manufactured as an injected plastic piece, since disassembling force F_D is considerably less than hold-down force F_N . This allows fuel injector 3 to be manufactured inexpensively.

Figure 2 shows the top view of an embodiment slightly modified compared to that shown in Figure 1 of an assembling device 1 according to the present invention. Radial extension 15, collar section 13, thread 20 formed on collar section 13, and openings 19 designed as unthreaded bore holes on collar section 13 can be seen. The modification with respect to the embodiment illustrated in Figure 1 is that two threads formed in the threaded bore holes on collar section 13 are diametrically opposite in section plane III-III, while in the embodiment illustrated in Figure 1, one thread 20 and one unthreaded opening 19 are arranged in section plane III-III to better illustrate the present invention.

While both threads 20 on collar section 13 are arranged diametrically opposite one another, three unthreaded openings 19 on collar section 13 are peripherally distributed almost uniformly so that the angular spacing between the individual openings is at least 90° , ideally 120° . Thus a peripherally

uniform hold-down force can be transmitted to fuel injector 3 via assembling device 1 according to the present invention.

As can also be seen from Figure 2, in the embodiment illustrated in Figure 2, radial extension 15 surrounds fuel injector 3 not illustrated in Figure 2 in a smaller angular area than jacket body 12 and/or collar section 13 formed on jacket body 12. This facilitates insertion of fuel injector 3 into assembling device 1.

Figure 3 shows a section along line III-III in Figure 2. The illustration largely corresponds to the illustration of assembling device 1 of Figure 1 with the difference that, as explained previously, two threads 20 are arranged instead of one thread 20 and one unthreaded opening 19.

Assembling device 1 according to the present invention can be manufactured economically as a deep-drawn sheet metal part. Threads 22 on cylinder head 2 and threads 20 on collar 13 of assembling device 1 have the same diameter and the same taper, so that assembling screws 21 can be used as disassembling screws 25 at the same time. Therefore, in order to disassemble assembling device 1 and fuel injector 3, assembling screws 21 are first loosened and removed and then inserted into threads 20 and tightened.

Using assembling device 1 according to the present invention, high symmetric disassembling forces directed axially can be transmitted to fuel injector 3, preventing damage to cylinder head 2 made of light metal, for example.

The present invention is not restricted to the embodiments presented. For example, radial extension 15 may also be implemented via notches on jacket body 12 that are bent so that they protrude radially inward.

Claims

1. An assembling device (1) for assembling and disassembling a fuel injector (3) in a mounting hole (5) of a cylinder head (2) of an internal combustion engine having a jacket body (12) at least partially surrounding the fuel injector (3), on which jacket body a contact section (14), through which both a hold-down force (F_H) for holding down the fuel injector (3) in the mounting hole (5) and a disassembling force (F_D) for disassembling the fuel injector (3) can be exerted on the fuel injector (3), and a collar section (13) protruding from the mounting hole (5) are formed, characterized in that the collar section (13) has at least one thread (20), into which a disassembling screw (25) can be screwed so that when the disassembling screw (25) is tightened, it abuts on the cylinder head (2) and transmits such a disassembling force (F_D) to the collar section (13) that the assembling device (1) with the fuel injector (3) inserted into the assembling device (1) is extracted from the mounting hole (5).
2. The assembling device according to Claim 1, characterized in that a plurality of peripherally distributed threads (20), each for one disassembling screw (25), are arranged on the collar section (13).
3. The assembling device according to Claim 2, characterized in that two threads (20), each for one disassembling screw (25), are arranged on the collar section (13) diametrically opposite one another.
4. The assembling device according to one of Claims 1 through 3, characterized in that at least one opening (19) is provided on the collar section (13), in which opening an assembling screw (21) can be inserted so that the assembling screw (21) engages in a thread (22) provided in the cylinder head (2), a hold-

down force (F_N) such that the assembling device (1) with the fuel injector (3) inserted into the assembling device (1) is held down in the mounting hole (5) being transmitted to the collar section (13) by tightening the assembling screw (21).

5. The assembling device according to Claim 4, characterized in that a plurality of peripherally distributed openings (19), each for one assembling screw (21), are arranged on the collar section (13).

6. The assembling device according to Claim 5, characterized in that three openings (19) in the form of bore holes (19), each for one assembling screw (21), are arranged on the collar section (13) at an angular distance of more than 90° from one another.

7. The assembling device according to Claims 4 through 6, characterized in that the threads (20) and openings (19) in the collar section (13) are dimensioned so that the assembling screws (21) can be used as disassembling screws (25).

8. The assembling device according to one of Claims 1 through 7, characterized in that the contact section (14) has a radial extension (15) directed inward and an axial extension (16) extending axially over the radial extension (15), the axial extension (16) transmitting the hold-down force (F_N) to the fuel injector (3) and the radial extension (15) engaging in a disassembling groove (17) of the fuel injector (3) in order to transmit a disassembling force (F_D) to the fuel injector (3).

9. The assembling device according to Claim 8, characterized in that the radial extension (15) surrounds the fuel injector (3) in a smaller angular area than the jacket body (12) and/or the collar section (13).

10. The assembling device according to Claims 1 through 9,

characterized in that the assembling device (1) is
manufactured by deep drawing from a piece of sheet metal.

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
2225
2226
2227
2228
2229
2230
2231
2232
2233
2234
2235
2236
2237
2238
2239
2240

Abstract

An assembling device (1) for assembling and disassembling a fuel injector (3) in a mounting hole (5) of a cylinder head (2) of an internal combustion engine has a jacket body (12) at least partially surrounding the fuel injector (3). A contact section (14), on which both a hold-down force (F_N) for holding down the fuel injector (3) in the mounting hole (5) and a disassembling force (F_D) for disassembling the fuel injector (3) can be exerted on the fuel injector (3), and a collar section (13) protruding from the mounting hole (5) are formed on the jacket body (12). The collar section (13) has at least one thread (20), in which a disassembling screw (25) can be screwed in so that when the disassembling screw (25) is tightened it abuts on the cylinder head (2) and transmits a disassembling force (F_D) on the collar section (13) so that the assembling device (1) with the fuel injector (3) inserted into the assembling device (1) is extracted.

1/2

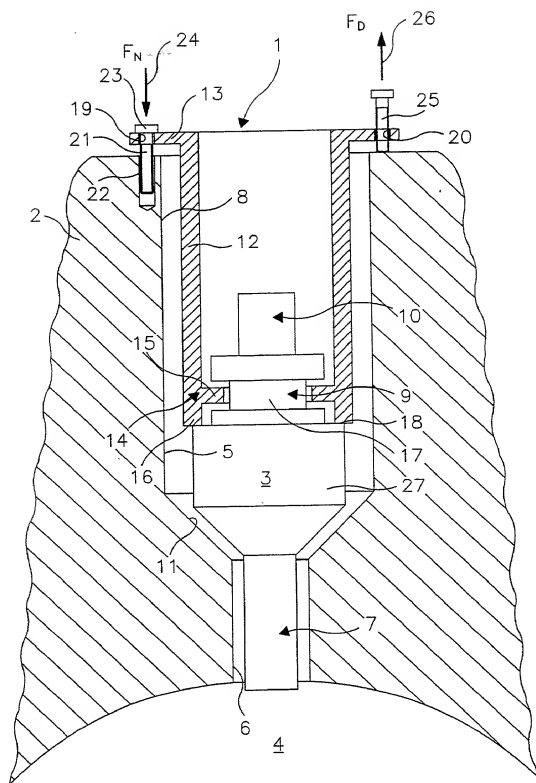


Fig.1

2/2

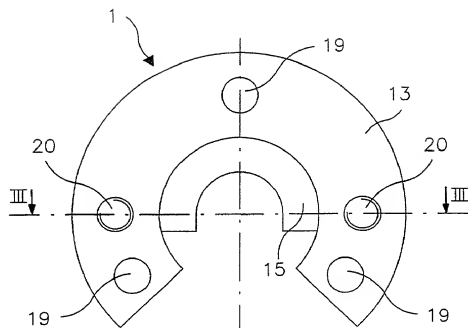


Fig.2

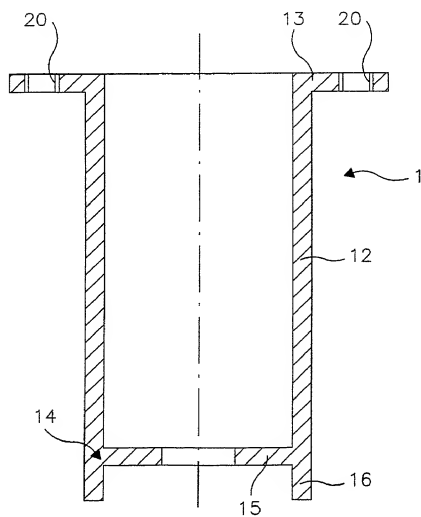


Fig.3

COMBINED DECLARATION AND
POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below adjacent
to my name.

I believe I am the original, first and sole inventor (if only one name is listed
below) or an original, first and joint inventor (if plural names are listed below) of the subject
matter which is claimed and for which a patent is sought on the invention entitled
**ASSEMBLING DEVICE FOR ASSEMBLING AND DISASSEMBLING A FUEL
INJECTOR** and the specification of which:

- ☐ is attached hereto;
- ☒ was filed as United States Application Serial No. 09/622,290 on
_____, 19__ and was amended by the Preliminary Amendment
filed on _____, 19__.
- ☒ was filed as PCT International Application Number PCT/DE99/03143,
on the 30th day of September, 1999
- ☐ an English translation of which is filed herewith.

I hereby state that I have reviewed and understand the contents of the above-
identified specification, including the claims, as amended by any amendment referred to
above.

I acknowledge the duty to disclose information which is material to the
examination of this application in accordance with Title 37, Code of Federal Regulations,
§1.56(a). I hereby claim foreign priority benefits under Title 35, United States Code § 119 of
any foreign application(s) for patent or inventor's certificate or of any PCT international
applications(s) designating at least one country other than the United States of America listed
below and have also identified below any foreign application(s) for patent or inventor's
certificate or any PCT international application(s) designating at least one country other than
the United States of America filed by me on the same subject matter having a filing date
before that of the application(s) of which priority is claimed:

**PRIOR FOREIGN/PCT APPLICATION(S)
AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. § 119**

Country : Federal Republic of Germany

Application No. : 198 57 485.1

Date of Filing: December 14, 1998

Priority Claimed

Under 35 U.S.C. § 119 : ☒ Yes ☐ No

I hereby claim the benefit under Title 35, United States Code § 120 of any United States Application or PCT International Application designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations § 1.56(a) which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application:

**PRIOR U.S. APPLICATIONS OR
PCT INTERNATIONAL APPLICATIONS
DESIGNATING THE U.S. FOR BENEFIT UNDER 35 U.S.C. § 120**

U.S. APPLICATIONS

Number :

Filing Date :

**PCT APPLICATIONS
DESIGNATING THE U.S.**

PCT Number :

PCT Filing Date :

I hereby appoint the following attorney(s) and/or agents to prosecute the above-identified application and transact all business in the Patent and Trademark Office

connected therewith.

(List name(s) and registration number(s)):

Richard L. Mayer,	Reg. No. <u>22,490</u>
Gerard A. Messina,	Reg. No. <u>35,952</u>
_____	Reg. No. _____
_____	Reg. No. _____

2

All correspondence should be sent to:

Richard L. Mayer, Esq.

Kenyon & Kenyon

One Broadway

New York, New York 10004

Telephone No.: (212) 425-7200

Facsimile No.: (212) 425-5288

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment or both under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Full name of inventor **Waldemar HANS**

Inventor's signature Waldemar Hans

Date 04.04.2000

Citizenship Federal Republic of Germany

Residence Adam-Kraft-Str. 7F

D-96050 Bamberg

Federal Republic of Germany

DEX

Post Office Address Same as above

Full name of inventor **Mathias LINSEN**

Inventor's signature Mathias Linse Date 05.10.2000

20
Citizenship Federal Republic of Germany

Residence Erlenweg 19
D-96123 Litzendorf
Federal Republic of Germany DEX

Post Office Address Same as above

Full name of inventor **Christof VOGEL**

Inventor's signature Christof Vogel Date 05. Oct. 2000

Citizenship Federal Republic of Germany

Residence Sandstr. 12
D-96120 Bischberg
Federal Republic of Germany DEX

Post Office Address Same as above